


Surface Fixed

Colossus Chimes Page 1 of 2




Instrument Components:

Colossus Chimes are preassembled

Metric Conversion: 100mm/4" 250mm/10" 600mm/24" 1.5m/59" 1565mm/62" 2352mm/93"



Installation Instructions




1. Attach Surface Fixing plates to the base of each chime. (1.1) (See Surface Fix Plate Installation Sheet)

1.5m

2.Locate Chimes to desired location and mark holes to fix to desired surface.


Surface fixing centre spacing 600mm for each chime and 300mm for beater poles



3. Fix to Surface using recommended ground anchors not supplied.

covered and secure using cover caps provided

4. Make sure all fixings are

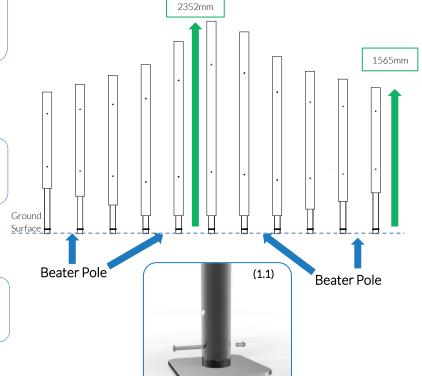

Weight of heaviest part 9kg (Chime)



Surface Fix Components: M10x50 Security Screw M10 Barrel Nut 2 Part Cover Cap









with 1.5m free space

(from widest point) around it.



Surface Fixed

Colossus Chimes Page 2 of 2



Components:

x15






2 Part Cover Cap


Thread Lock Solution
Required (Not Supplied)



Ground Fix Post Installation

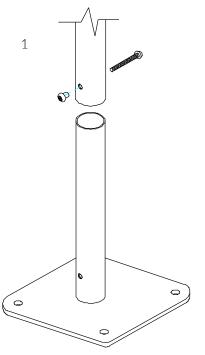

Locate the Surface fix Plate into the leg of the instrument.

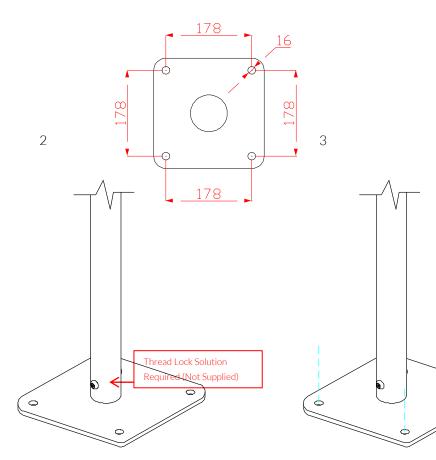

Fix instrument to Surface fix plate using M10 bolt and Barrel Nut and use **thread locking solution** to prevent fixings working loose.

Fix Surface Plate to the ground surface **Ground Anchors Not provided**cover fixings with caps provided

Tools:

TX 45 Driver Bit

