


# Installation Instructions

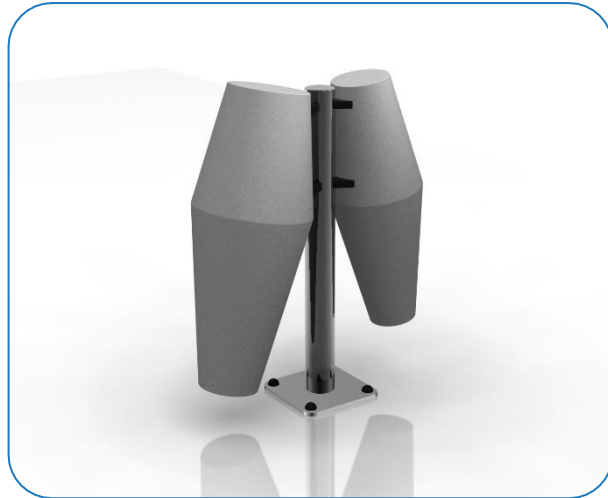


1. Attach the steel leg to each of the Tumbadoras with the M10x50 security screws, square washers and PU mounts. **(1.1)** (See Assembly Guide)

2. Attach Surface Fixing posts to legs. **(1.2)** (See Ground Fix Post Installation Sheet)




3. **Locate Plate** in desired location and mark holes to fix to desired surface.

4. **Fix to Surface** using recommended ground anchors not supplied.

5. Make sure all fixings are covered and secure using cover caps provided.

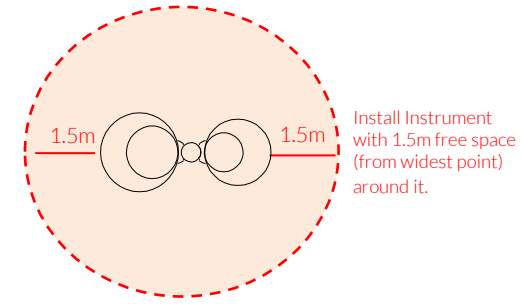

**CAUTION:** Drum surface can get hot in direct sunlight, if possible install in shaded areas.

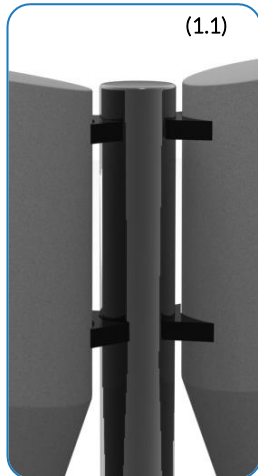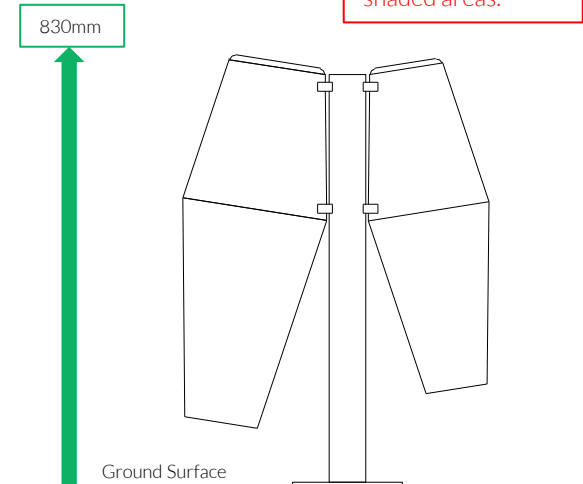





Weight of heaviest part **16kg** (Large Tumba Drum)

## Surface Fixed

Tumbadoras  
Page 1 of 3






### Instrument Components:

-  x4
- M10x50 Security Screw
-  x4
- M10x50x3 Square washer
-  x2
- PU 200 Mount
-  x2
- PU 250 Mount

Metric Conversion:  
250mm/ 10"  
400mm/ 16"  
850mm/ 33"  
1.5m/ 59"



Surface Fix Components:

-  x1
- M10x70 Security Screw
-  x1
- M10 Barrel Nut
-  x4
- 2 Part Cover Cap

**Ground Anchors not supplied**



Spares available from [percussionplay.com](http://percussionplay.com) or from your local distributor

**25 Kg**

Tools:

x1  
TX 45 Driver Bit

## Surface Fixed


Tumbadoras  
Page 2 of 3



### Instrument Components:



- x4  
M10x50 Security Screw
- x4  
M10x50x3 Square washer
- x2  
PU 200 Mount
- x2  
PU 250 Mount

Thread Lock Solution  
Required (Not Supplied)

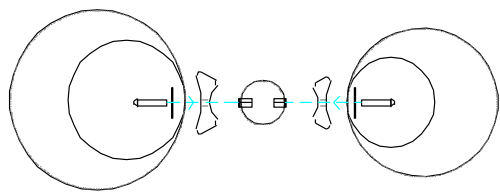

PPTUMB PLAN

Thread Lock Solution  
Required (Not Supplied)

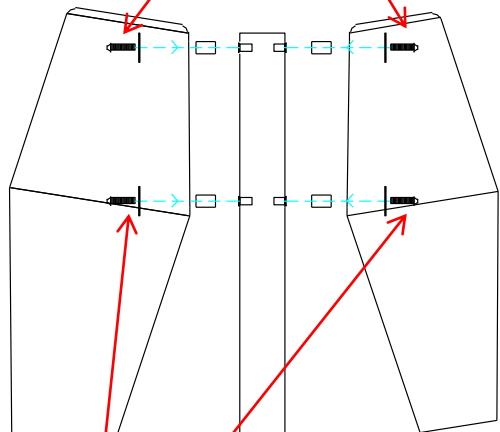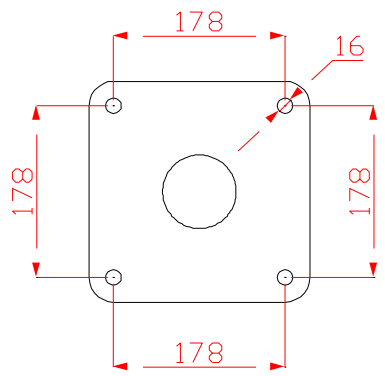

PPTUMB FRONT

Thread Lock Solution  
Required (Not Supplied)

### COMPONENTS LIST:

- M10x50 Pin torx X4
- M10x50x3 square washer X4
- PU MOUNT 200 X2
- PU MOUNT 250 X2
- M10x70 Pin torx X1
- M10 Barrel Nut Pin torx X1



Surface Fix  
Components:

- x1
- x1
- x4

Ground Anchors  
not supplied



Spares available from  
[percussionplay.com](http://percussionplay.com) or from your  
local distributor

25 Kg

Tools:

 x2  
TX 45 Driver Bit

## Surface Fixed

Tumbadoras  
Page 3 of 3



### Components:



x1

M10 Barrel Nut




x1

M10x70 Security Screw




x4


2 Part Cover Cap

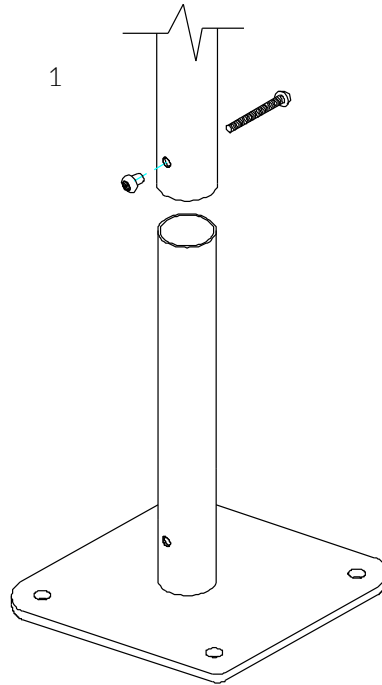

1  
Locate the Surface fix Plate into the leg of the instrument.

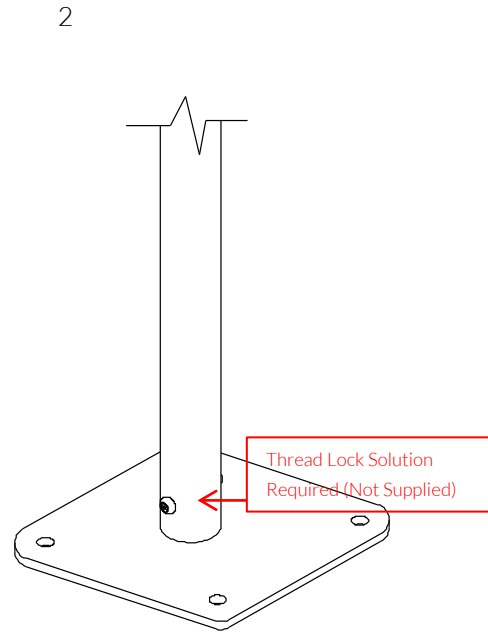

2  
Fix instrument to Surface fix plate using M10 bolt and Barrel Nut and use **thread locking solution** to prevent fixings working loose.

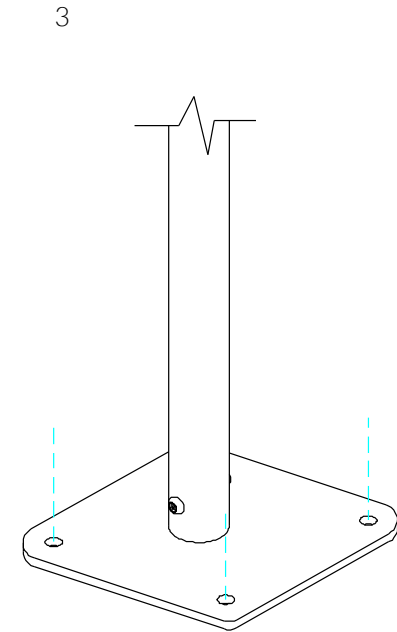

3  
Fix Surface Plate to the ground surface **Ground Anchors Not provided** cover fixings with caps provided

Thread Lock Solution  
Required (Not Supplied)



MADE IN  
BRITAIN

BSEN 1176

